

Work happily



10.2026




naggura'swop

naggura.com

Swop 2L Evo Physio



Dimensions

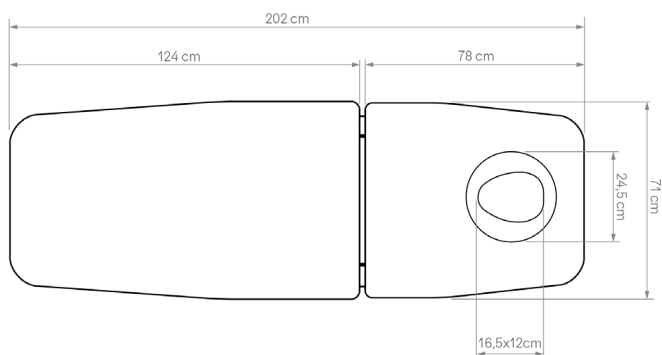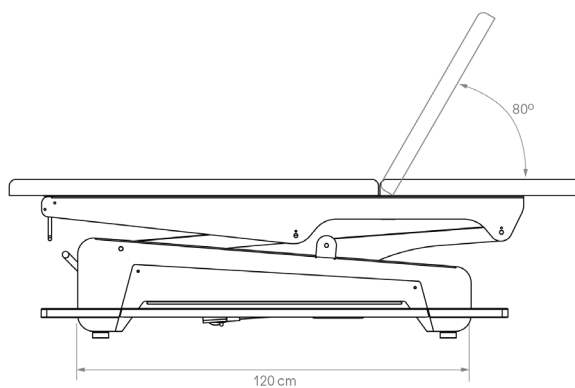

Swop 2L Evo Physio



Physiotherapy

General Specifications

MOTORS

1 engine height (6000N)

DIMENSIONS (LENGTH X WIDTH)

202 x 71 cm

HEIGHT (MIN. AND MAX.)

49/97 cm

WEIGHT

100 kg

LIFTING CAPACITY

200 kg

POWER SUPPLY

110-240 V - 50/60 Hz

FRAME COLOUR

Dark grey: RAL 7015

Light grey: RAL 7047

ISULATION CLASS

Class I

PRODUCT CLASSIFICATION

Class I Equipment

APPLIED PARTS

Type B

MOISTURE RESISTENCE

IPx0

FEEDER CABLE

3m, white

MOTOR SPEED

2,33cm/s

MAX INTENSITY

9A

Accessories

Bed Covers



Bamboo Sound System



Face+ integrated cushion (replacement part)



Operation

Backrest section with 2 gas springs.

Swop 360° Height Control Ergonova System, easy access from all sides of the table.

4 wheels turning 360°. Fully integrated system underneath the base frame. 1 Central lever.

Ambient LED light.

Heated cushions with 2 temperature levels, auto switch-off (1h) and switches on both sides.

Safety

Safety switch with key.

Motor with safety clutch.

Warranty and conformity

WARRANTY

The metal frame comes with a 10-year warranty. All other components of the stretcher have a 2-year warranty. We also offer technical service with coverage throughout Spain, France, Italy, Germany, Belgium, and Portugal, guaranteeing fast and efficient assistance.

CONFORMITY

These products are manufactured according to the essential requirements established in the European Medical Devices Directive (Annex II+III of Regulation (EU) 2017/745).

Upholstery

Thickness: 6,5cm

Density: 60 kg/m³ (4cm) + 40 kg/m³ (1cm)

+ wooden base (1.5cm)

Fully integrated Face+ seamless face cushion with plug (both in PUR).

Seamless upholstery with round edges.

Naggura Skin upholstery: PU compound.

Protection against germs and UV rays.

Superior abrasion resistance: >150K cycles.

Flame retardancy: BS 7176

Colour: Graphite

naggura.com